

SCT-210.4H48C


Variable Type Vacuum Capacitor (T48C Type)

Specification

Peak test Voltage	21 kVp (at 50, 60 Hz/ 1min)
RF Working Voltage	12.6 kVp
Capacitance nominal	35 - 45 pF
Linear Variability	1.15 ± 0.36 pF/Turn ($C \geq 35$ pF)
Maximum Current	34 Arms (13.56MHz)
Tuner Turns	17.6 ± 0.5 Turns
Tuner Operating Torque	- Nm
Total Length	72 mm
Mounting Length	62 mm
Outer Diameter	$\phi 48$ mm
Weight	0.31 kg



Drawing

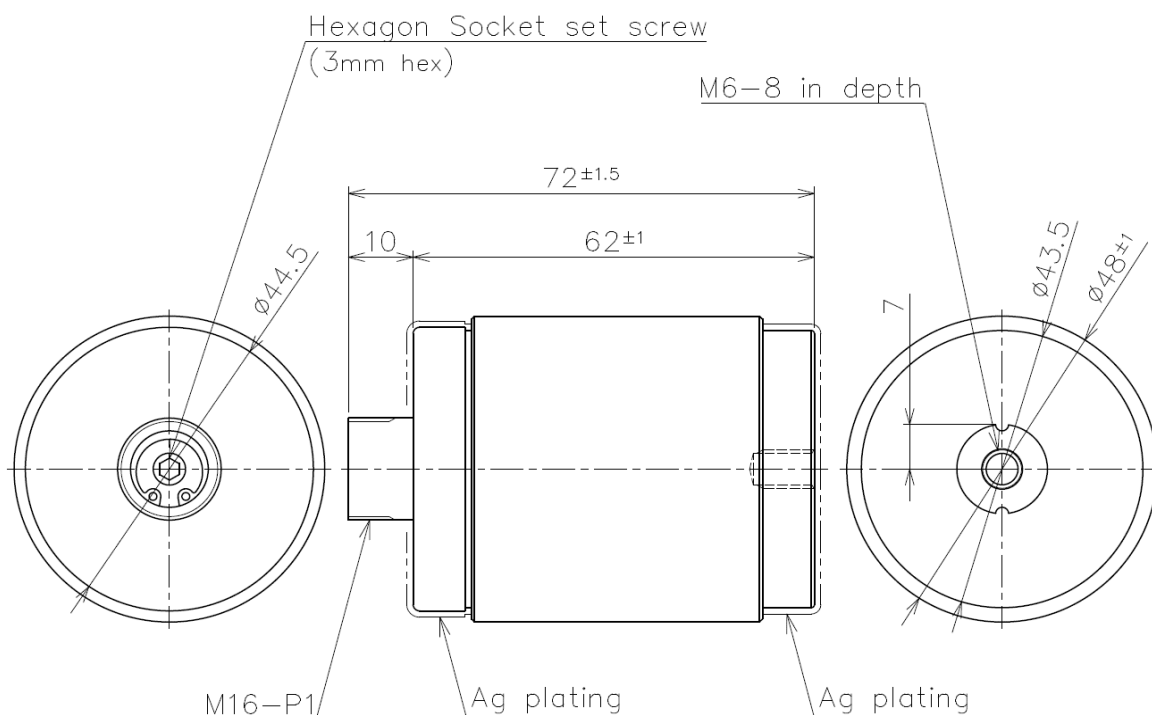


SCT-210.4H48C

Variable Type Vacuum Capacitor (T48C Type)

MEIDEN

MQ90A40397

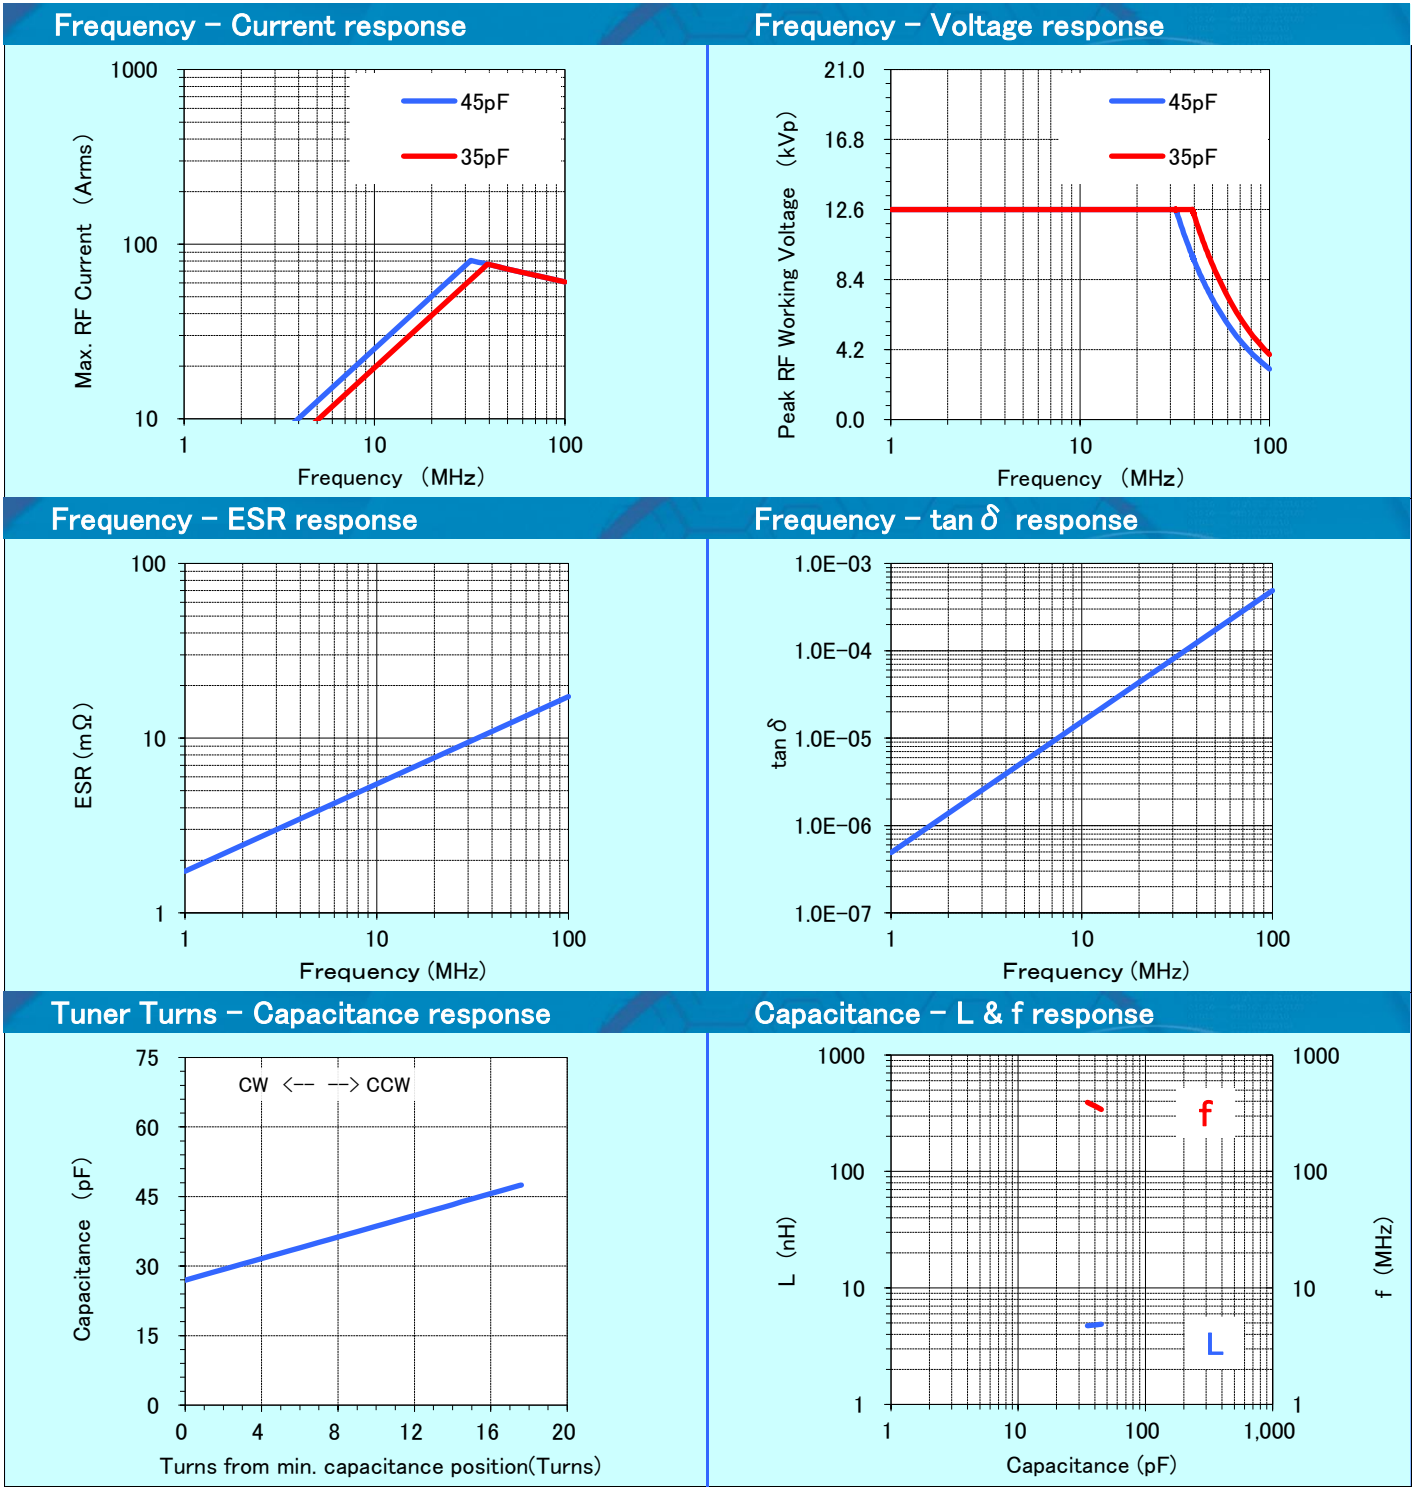

Notice: Current collecting system: Capacitor both-end full-face collection.
Cooling System: Conduction Cooling.
Permissible surface temperature: 125°C.
(The surface temperature changes with current collecting conditions and ambient temperature.)
Ambient temperature: 25°C.

In regard to queries about these products, please contact below.

MEIDENSHA CORPORATION

Vacuum device Sales Department: ThinkPark Tower 2-1-1 Osaki, Shinagawa-ku, Tokyo, 141-6029 Japan

Phone: 81-3-6420-7590 Facsimile: 81-3-5745-3058 URL: <http://www.meidensha.co.jp>

As of Apr. 2023